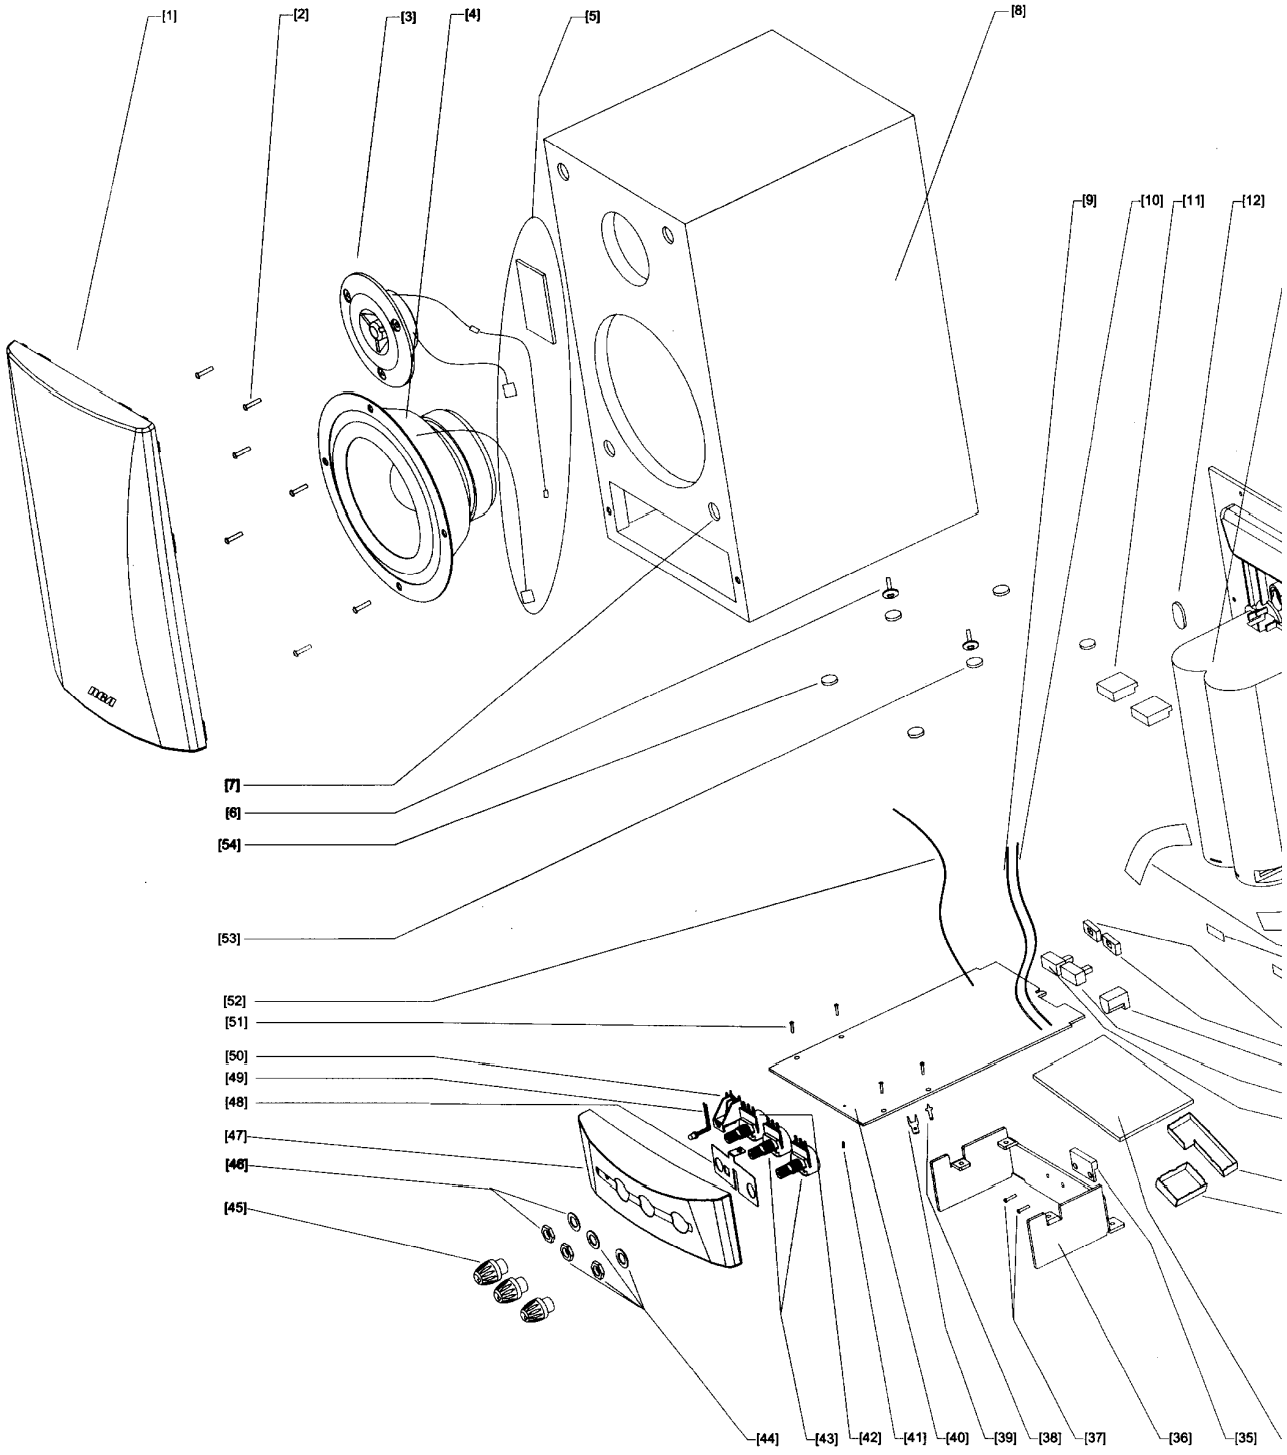

PORTABLE 900MHz WIRELESS SPEAKER SYSTEM
EXPLODED VIEW (400-5029)

SHEET 1

RECEIVER

FAXBACK DOC # 12932

PORTABLE 900MHz WIRELESS SPEAKER SYSTEM
EXPLODED VIEW (400-5029)
SHEET 2
RECEIVER
FAXBACK DOC # 12932

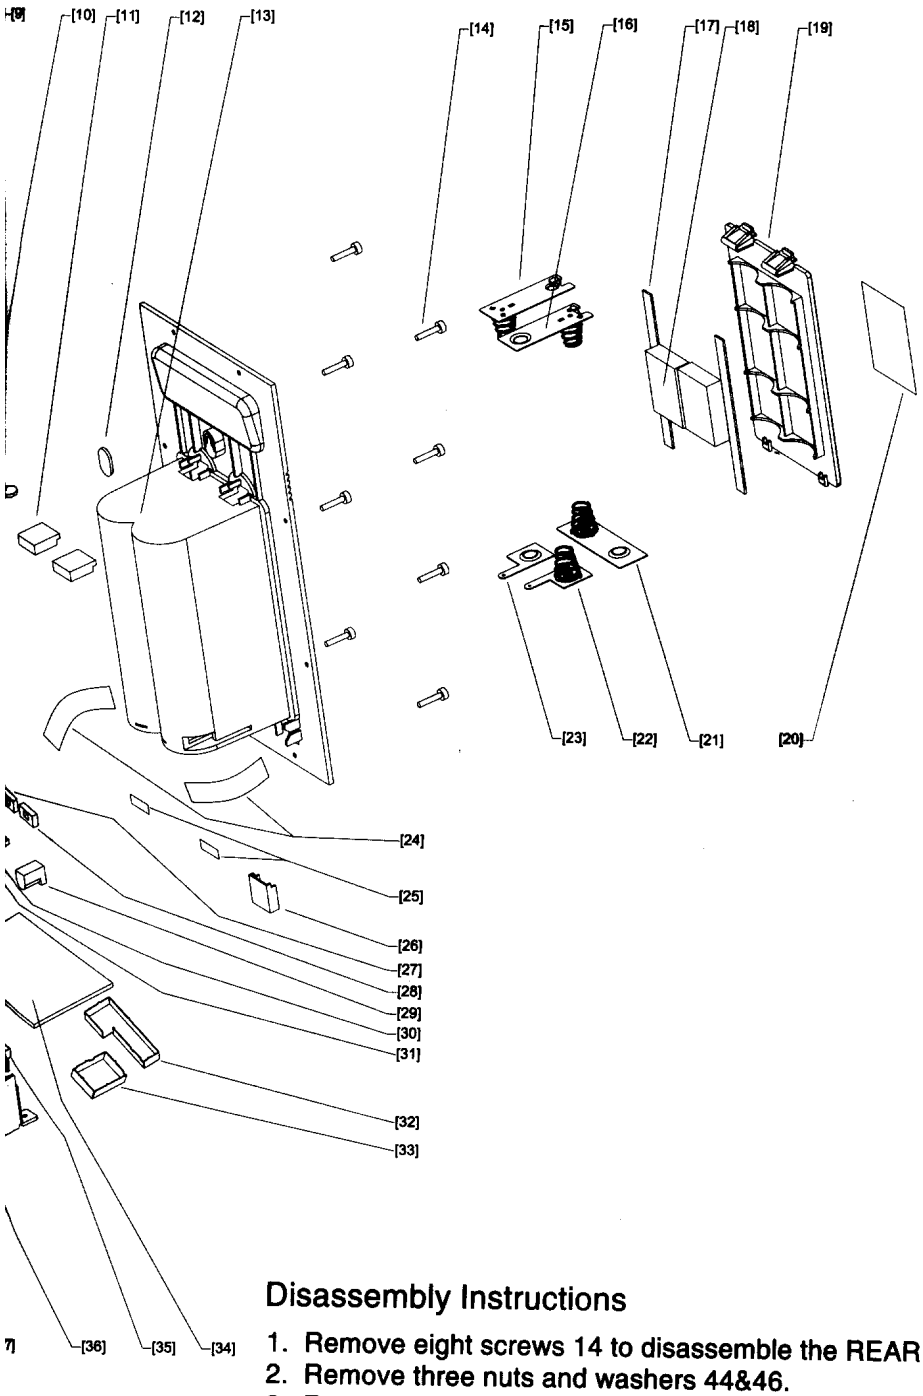

Disassembly Instructions

1. Remove eight screws 14 to disassemble the REAR PANEL.
2. Remove three nuts and washers 44&46.
3. Remove the glue which on the wire UL 1007 52.
4. Pull out three terminals of lead wire assy 5 which connect to RX BASE PCB 40.
5. Remove two screws and stoppers 6&53 to disassemble the RX BASE PCB.